NOTES:

CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE I.D.O.T. STANDARD SPECIFICATIONS FOR ROAD & BRIDGE CONSTRUCTION ADOPTED JANUARY 1, 2007.

CONCRETE SHALL BE CLASS SI AND IN ACCORDANCE WITH SECTION 503.


REINFORCING STEEL SHALL BE GRADE 60, EPOXY COATED AND IN ACCORDANCE WITH SECTION 508.

EXCAVATION AND BACKFILL SHALL BE IN ACCORDANCE WITH SECTION 502.

EXCAVATION AND CONSTRUCTION SHALL NOT UNDERMINE THE EXISTING PAVEMENT.

SEE SHOP DRAWINGS FOR ANCHOR BOLT CIRCLE REQUIREMENTS.

FOUNDATION SHALL BE PAID FOR AS "LIGHT POLE FOUNDATION (SPECIAL)".

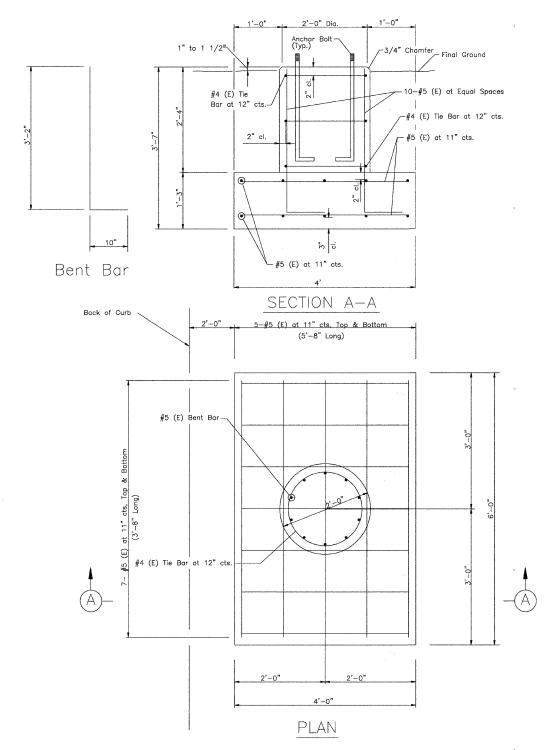

LIGHT POLE FOUNDATION, SPECIAL

SCALE: 1"= 1'-0"

Smith

St. 84PROLECT_CONTACT)

SKLLENT)

2/11/2010 11/44:23 AM

080511_DET_O1.cgn

pdf.pft stendard-froms.tbl

FILE NAME:
PLOT DRIVER:
PEN TABLE:

EC Group, Inc.	USER NAME = chartke	DESIGNED -	JP	REVISED -	Т
1 HR Green Company 10.N. Froud Street, 10.1. E 60050-2138 10.5.86.1778 1. 616.596.1761		DRAWN -	SP	REVISED -	7
	PLOT SCALE = NTS	CHECKED -	TH	REVISED -	1
810.380.1778 IL 815.380.1761 www.secgrouphic.com -McHenry,IL -Yorkville,IL -New Lenox,IL -Chicago,IL	PLOT DATE = 2/11/2010	DATE -	2/11/10	REVISED	7
				· · · · · · · · · · · · · · · · · · ·	

VILLAGE OF MUNDELEIN

CONSTRUCTION DETAILS
U.S. ROUTE 45 (LAKE STREET)

SHEET NO. 1 OF 1 SHEETS STA. 121+05

TO STA. 126+25

63448 C-91-295-10 080511_DET_01.dgn